
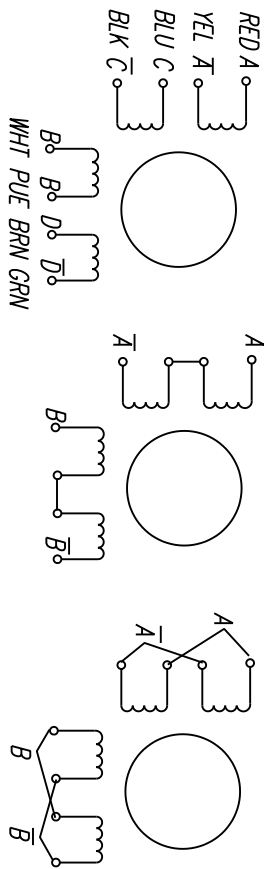
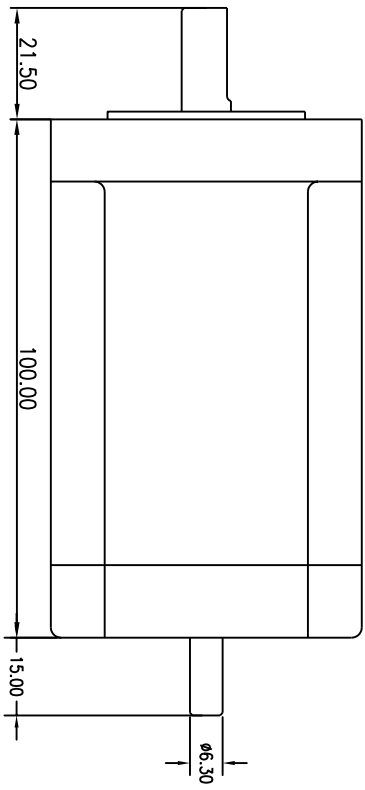


COMMON RATINGS

Step Angle	1.8 Degrees
Positional Accuracy	+/- 3%
Number of Phases	Two or Four
Temperature Rise	80C Maximum
Dielectric Strength	500V DC
Insulation Resistance	100M Ohm (500V DC)
Radial Play	0.025mm Max (450g Load)
Insulation Class	Class: B

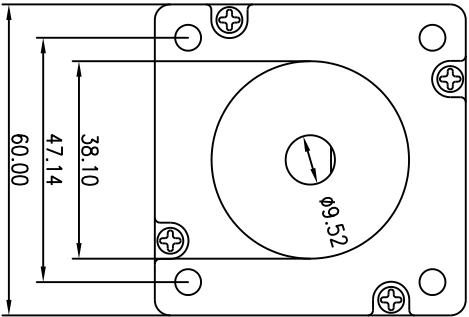

COLOUR OF LEADS

SERIES

PARALLEL

Part Number	Holding Torque Nm(+/- 10%)	Rated Current per phase A	Ph. resistance Ohms (+/- 10%)	Inductance mH(+/- 20%)	Mass kg
23HSX-203(X)	3.5	5.0(Bipolar)	1.34	4.1	1.0

16 MAY2007

www.CNCDirect.co.za

23HSX-203-(D)

STEPPER MOTOR